

# Phase Modulation Driver 100436A



Phase Modulation Capable RF Driver / Optical Stabilizer

Driver

Stabilizer

DDS

8 Output

Ethernet

## Features:

- Programmable Amplitude and Phase
- Open or Closed Loop Operation
- Internal Digital Synthesizer
- Phase shifted RF outputs
- Digital Tuning
- 50 to 150MHz
- USB and Ethernet
- Alarm Output




## Applications:

- AO Cell Driver
- External Optical Stabilizer

## Overview

The Phase Modulation Capable RF Driver / Stabilizer is an eight channel, two phase RF driver intended to drive devices such as the Harris H-401. The driver provides both amplitude and phase modulation capabilities in a single unit. The device can be operated in driver mode where the operator has full control over amplitude, frequency, and phase, or in stabilizer mode where the driver automatically adjusts the operating parameters based on optical feedback from an optical pick-off point.

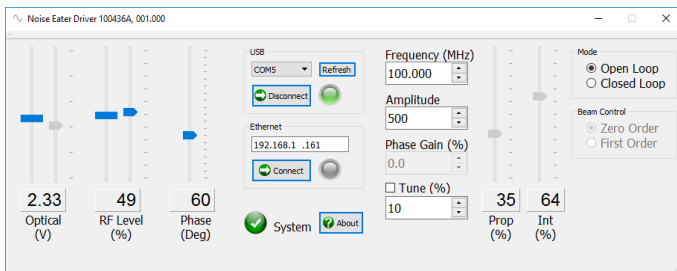

## Operation

Configuration and control are accomplished using the supplied Windows application and USB or Ethernet connection. Once connected, the operator has full control over frequency, phase, amplitude, and loop parameters.

In stabilizer mode a portion of the optical beam (after the AO cell) is sampled and fed into the "optical" BNC port. The driver automatically adjusts the amplitude and/or relative phase in an attempt to stabilize the optical level exiting the AO cell. The operator can select between open or closed loop modes, first order or zero order beam pick-off point, and loop tuning parameters.

## Ordering Information

Part Number	Description
100436A	Phase Modulation RF Driver with power supply

## Specifications

Parameter	Units	Typical Specifications
Frequency	MHz	50 to 150, 1Hz steps
Phase adjustment range	Degrees	0 to 359 in 1 degree steps
Amplitude adjustment range	V	0 to 2.5 (< 5mV steps)
Closed loop amplitude control range	dB	>15dB (continuous resolution)
1dB RF compression (per output)	dBm	21
RF output impedance	Ohms	50, custom / HDMI form factor
Optical input interface level	V	0 to 5, 50Ω internally terminated (BNC)
Alarm Output	V	3.3 CMOS levels
Computer Interface		USB-2, Ethernet, Windows driver supplied
Power		5V, 3A (adapter supplied)
Unit Dimension		7" x 4.5" x 1.5" (with bumpers)